


MODEL

613

Manual Bandsaw

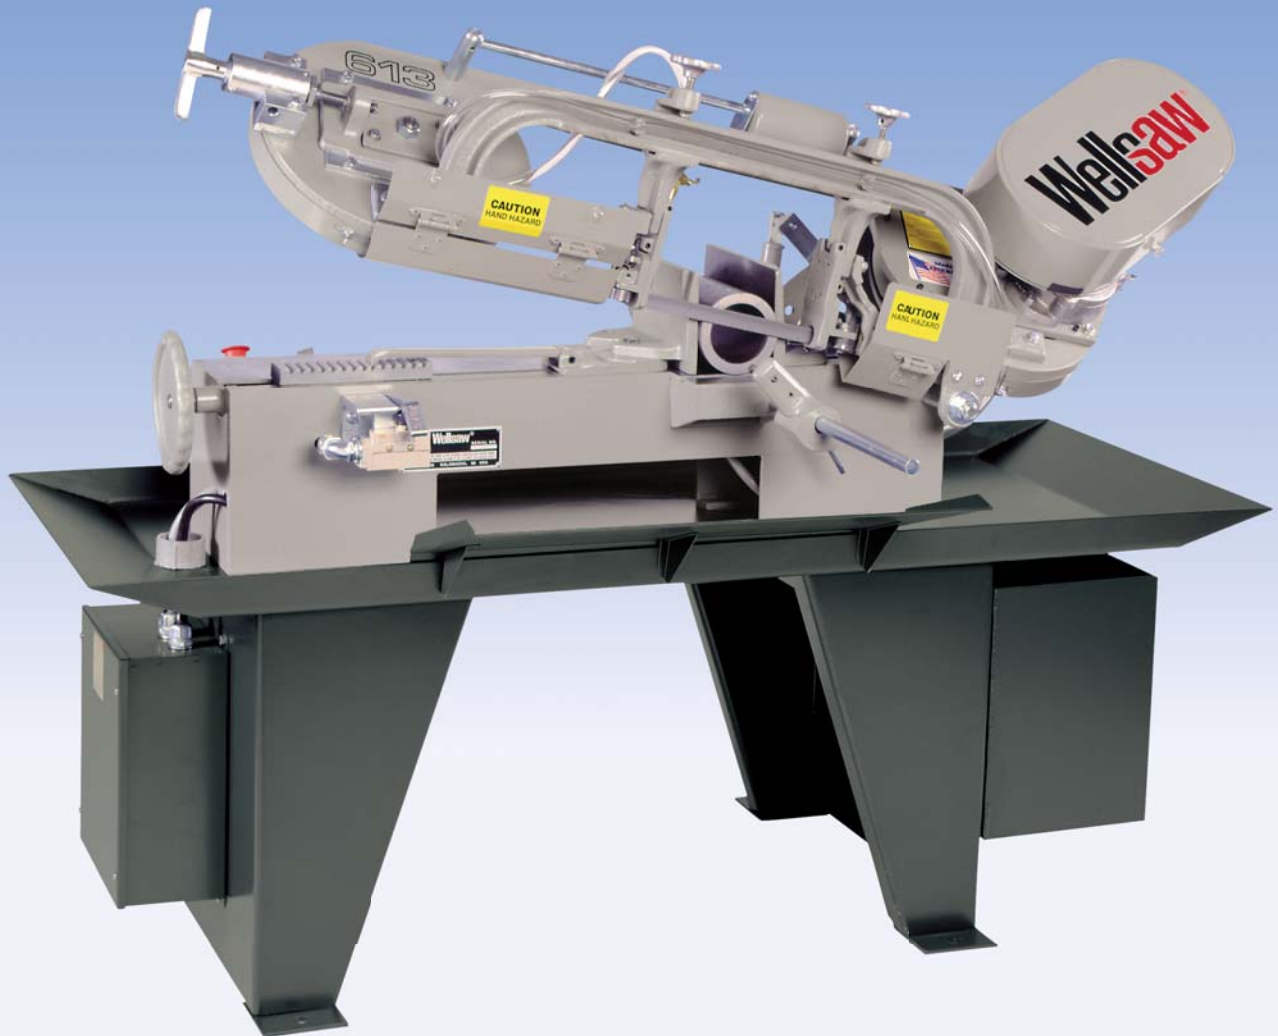


Manufactured in the United States of America

Wellsaw[®]

Built better to work stronger and last longer

613

Model 613 Manual Bandsaw

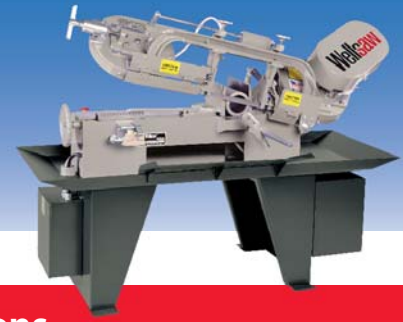

Standard Features

Hydraulic Feed Control with Adjustable Counterbalance Spring
Ball Bearing Blade Guides
Perimeter Ring Gear Blade Drive
1hp Baldor® Motor
Four Blade Speeds
Rite-Tension® Band Tensioning Device
Wet Cutting System
Blade Brush
110 Volts at Controls
Overload and Undervoltage Protection
Precision Ground Bed
Quick Acting Vise
Positive Frame Lock
Adjustable Stock Stop
Auto Shut-Off at End of Cut
OSHA Blade Guarding
Tiger-Tooth® Bi-Metal Blade
Coolant for Initial Start-Up

Available Factory Installed Options

Variable Speed Blade Drive (70-375 SFPM)
Casters (Set of 4, 2 Locking)
NFPA Electrics (with Disconnect)
Totally Enclosed Motor
Work Light with Transformer
Stock Stand
5' and 10' Non-Powered Conveyors

Specifications

Capacity	
Round	7"
Flat	13"
Rectangular	6" x 13"
45° Angle	6" x 6-1/2"
Blade Size	3/4" x .035" x 8'3"
Blade Speeds	50-90-160-250 SFPM
Blade Guides	Six Sealed Ball Bearings
Blade Tension	Manual Rite-Tension®
Electrical Options	115-208-230/60/1 or 208-230-460/60/3
Coolant System	
Tank Capacity	8 Gallons
Submersible Pump	115V/.6 Amp/170 GPH
Vise Control	Manual Screw
Swivel Vise	To 45°
Feed Control	Hydraulic with Adjustable Counterbalance
Band Wheels	11" Diameter Cast Iron
Bed Height	29"
Floor Area	25"W x 60"L
Shipping Weight	Approx. 650 Lbs.

Wellsaw®